

Parameswara 300 Foot Jack-up Drilling Unit

General Description	
Design	Baker Marine BMC 300 IC
Year Built / Last Upgrade	1983 / 2001
Hull Dimensions	212 ft. x 210 ft. x 26 ft.
Legs (3)	423 ft. long triangular
Quarters Capacity	118 persons
Maximum Water Depth	300 ft.
Cantilever Envelope	45 ft. by 24 ft.
Maximum Variable Load (drilling)	Approx. 8,100 kips*


Maximum Variable Load (drilling) Approx. 8,100 kips*		
*a	lepending on water depth and geographical location	
Drilling Equipment		
Derrick	MH Pyramid bottleneck 170 ft. x 30 ft. x 30 ft., static hook load capacity 1,300,000 lbs. with twelve lines (1-1/2 in. drilling line)	
Drawworks	Ideco E-2100E 2,000 HP, driven by two (2) 1,000 HP GE 752 DC motors, complete with Elmagco 7040 electric brake	
Rotary Table	Ideco LR-375-E with independent drive using a GE 752 DC motor with 2-speed transmission	
Top Drive	National PS2-650/750 Power Swivel with 750 ST hoisting and 650 short tons drilling capacities, max. continuous torque 49,000 ft.lbs in low gear	
Pipe Handling	Hawk-jaw M100K-2GSR for tubular OD 4" to 9-1/2"; Spin Master 90HYD spinning wrench	
Mud Pumps	Three (3) National 12-P-160 triplex pumps 1,600 HP, each driven by two (2) 1,000 HP GE 752 DC motors, rated to 7,500 psi with HP liners	
Solids Control	Two (2) Brandt 2/48-10F-4TA dual tandem scalping shakers; four (4) Derrick FLC 504 shale shakers; one (1) Crestex 4104 Desander with 3 x 10" cones; one (1) Derrick mud cleaner with 16 x 4" cones mounted on one of the shakers.	

Storage Capacities		
Liquid Mud	2,115 bbls	
Drill Water	5,428 bbls.	
Fuel	3,849 bbls.	
Base Oil	1,740 bbls.	
Brine	1,509 bbls.	
Bulk Mud	4,575 cu. ft.	
Bulk Cement	4,575 cu. ft.	
Power Equipment		
Main Power	Four (4) Caterpillar 3516 diesel engines 1,615 HP each, driving four (4) Caterpillar SR4 1,140 kW AC generators	
Power Dist.	Five (5) Ross Hill SCR units, each rated at 1,500 amps, powering eight (8) GE 752 DC motors	
Well Control Equipment		
Diverter	Hydril MSP 29-1/2" annular preventer 500 psi WP with two (2) 16" discharge lines and two (2) 16" hydraulically operated ball valves	
BOP Stack	One (1) Hydril GXS 13-5/8" 5,000 psi annular preventer; one (1) Cameron Type U 13-5/8" 10,000 psi double ram preventer and one (1) Cameron Type U 13-5/8" 10,000 psi single ram preventer	
BOP Handling	Four (4) x 37.5 MT Ingersoll Rand hoist system	
Cranes		

Three (3) FMC Linkbelt ABS 218A cranes with 100 ft. booms, rated for 43 short tons at 25 ft. radius $\,$



R-Mar-2020

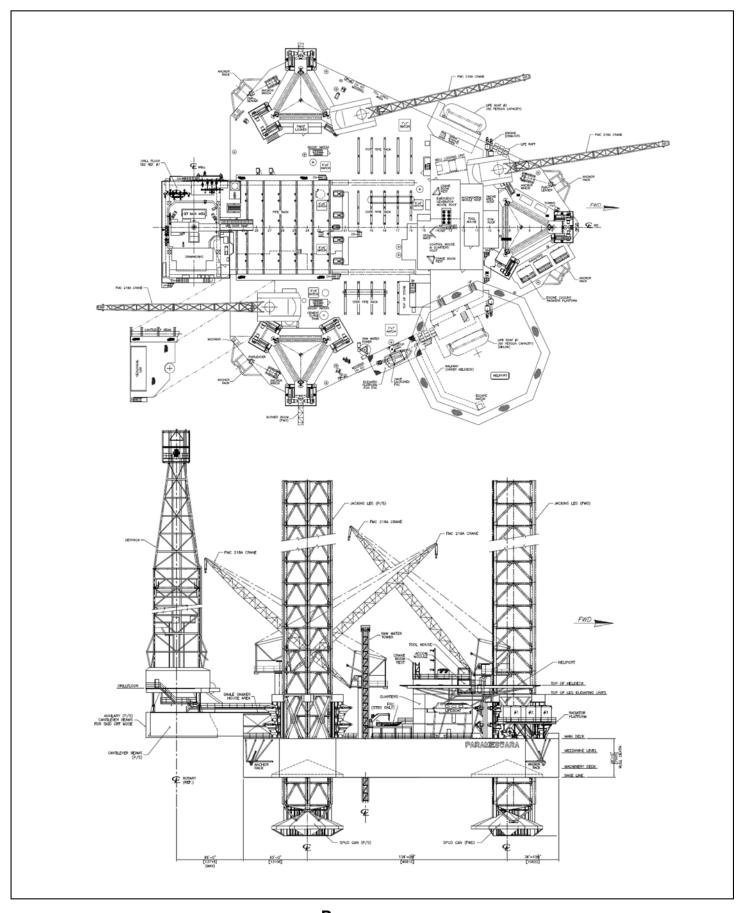

Parameswara

R-**Mar-2020**

